



NUMASLIDE

Wire, Flat-stock/strip

> 1 to 5 mm – 600 N/mm²
> .04 to .2" – 85 Ksi



CNC Multi Slide

Wire, Flat-stock/strip

NUMASLIDE

Main Features


- > 2D or 3D bending
- > from coil
- > for wire and flat-stock/strip
- > from 1 to 5 mm - .04" to .2" (tensile max 600 N/mm² / 85 Ksi)
- > top production speed
- > suitable for medium to large size production runs
- > no cams – only programmable servo motors
- > quick tooling / production changeover
- > simple tooling with quick attachment onto the machine slides
- > motors mechanical protection.
- > cycle time optimization and tooling adjustment by easy programming on touch screen

Dimensions

- > 3800 x 2200 x 1900 mm
- > 150 x 87 x 75"

Net weight

- > 6000 to 12000 kg
- > 13000 to 26000 lbs

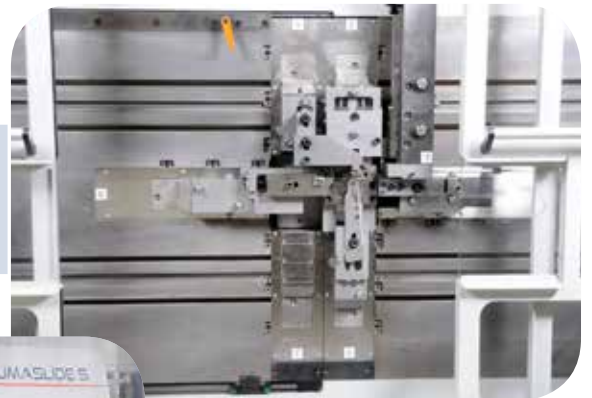

Parc d'Activités - F 88470 SAINT MICHEL SUR MEURTHE
Tel. : +33 (0)3 29 58 36 15 - Fax : +33 (0)3 29 58 46 47
mail : numalliance@numalliance.com

www.numalliance.com

FTECH-Numaslide-EN-14

www.dargdesign.com