

CNC Multi Slide




NUMAC-NUMAFLEX

Wire, Tube, Strip

> 2 to 10 mm – 600 N/mm²

> .08 to .4" – 85 Ksi

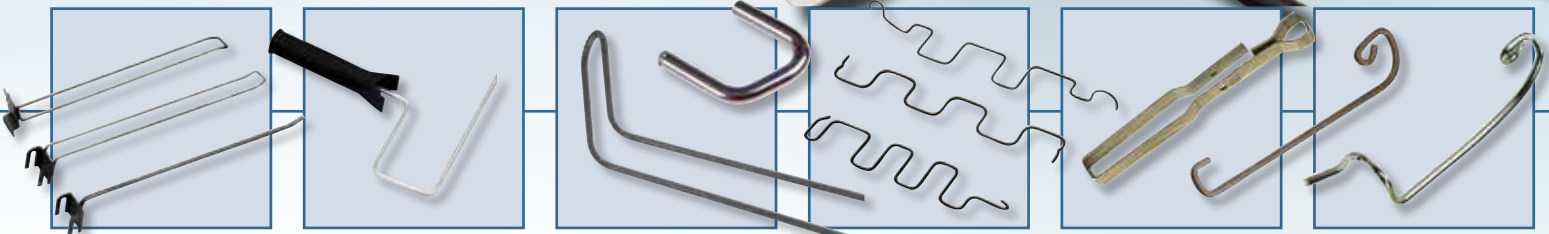


Revolutionizing CNC Technology for Wire, Tube and Strip Forming Machinery

CNC Multi Slide

Wire, Tube, Strip

NUMAC-NUMAFLEX



Main Features

- > 2D or 3D bending from precut lengths or coil
- > Top production speed thanks to full tooling or partial tooling solutions
- > Suitable for medium to large size production runs
- > Quick production changeover (no cams + tooling preset on plates)
- > Easy integration of secondary processes (large bed table)
- > Multiple feed possible

Numac

- > A full tooling solution provides top speed, top precision and top bending possibilities (i.e. not having the limitations of sequential bending like bend-in-bend, compound bend...)

Numaflex

- > A single or double head bender is integrated in the Numac for reducing tool cost and adding flexibility. Possible configurations vary from full sequential bending to a mix tooling + sequential bending.

Dimensions

- > 3600 to 5100 x 1400 x 2450 mm
- > 11.8 to 16.7 x 4.6 x 8'

Net weight

- > 6000 to 12000 kg
- > 13000 to 26000 lbs



NUMALLIANCE

Parc d'Activités - F 88470 SAINT MICHEL SUR MEURTHE
Tél. : +33 (0)3 29 58 36 15 - Fax : +33 (0)3 29 58 46 47
mail : numalliance@numalliance.com

www.numalliance.com